

EVOLVING PERSPECTIVES OF 4TH GENERATION MOBILE COMMUNICATION SYSTEMS

Vangelis Gazis, Nikos Houssos, Athanassia Alonistioti, Lazaros Merakos
Communication Networks Laboratory, Department of Informatics & Telecommunications,
University of Athens, 157 84, Athens, Greece,
email:{gazis, nhoussos, nancy, merakos}@di.uoa.gr

I. ABSTRACT

The last decade of the 20th century has been witness to remarkable technological developments in the area of wireless communication technologies. Following the commercial deployment – and subsequent worldwide success – of 2nd generation mobile telecommunication systems, such as GSM, standardization bodies, industry partners and regulatory fora from around the globe joined forces in producing the standards for 3rd generation mobile telecommunication systems, also known as UMTS. In parallel, the academic research community has been gradually shifting its focus in defining the scope of 4th generation systems. As a contribution to this ongoing effort, the present paper highlights fundamental concepts and presents key market developments in 4th generation mobile communication environments. It outlines their major high level requirements and identifies the fundamental building blocks of 4th generation system architectures in terms of technological solution sets. Finally, it proposes a set of priorities for the 4th generation research agenda.

A. Introduction

In the European Union, the debate about 4th generation systems has taken place mostly within the context of the IST Framework Programme activities [1] [2]. Out of this – still ongoing – process has spawned the vision of a system that enables an “always on, always best connected” mode of communication for the citizen of the forthcoming information society [3]. This widely accepted vision sketches a heterogeneous communication landscape comprising different wireless access systems in a complementary manner, where the user, supported by his/her personal intelligent agent(s), enjoys untethered connectivity and ubiquitous access to applications over the most efficient combination of wireless systems available. Figure 1 provides an illustration for that vision¹.

¹ The architectural details of particular wireless access systems are omitted from the figure on the basis that they all provide a logical termination of an IP forwarding service, which is represented by the mobility-aware QoS router icon.

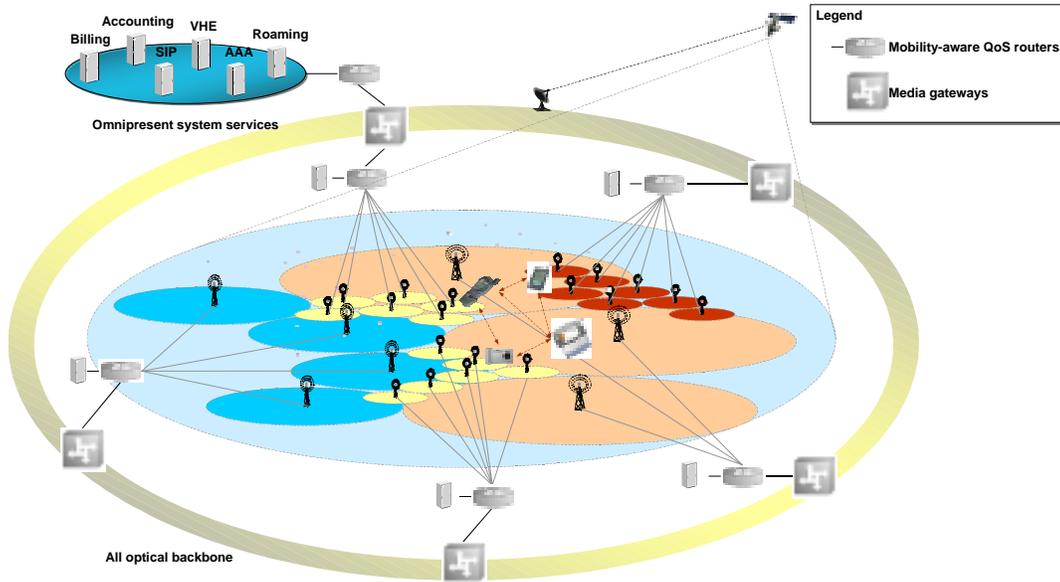


Figure 1. The emerging 4th generation heterogeneous network architecture.

Future mobile communication systems will be heterogeneous in nature, forming an integrated network environment that comprises various wireless technologies and access systems in a complementary manner. These individual access networks will interface to core network elements over the IP protocol, the lingua franca of networking technology. Regardless of their internal technical details (e.g., licensed or unlicensed frequency band, signaling protocols, air interface standard, etc), heterogeneous wireless access networks are expected to have the following in common:

- A dynamic address assignment mechanism (e.g., DHCP, SLP, GPRS/UMTS) that is capable of associating a short-lived or long-lived IP address to the respective wireless interface at the mobile terminal.
- A transparent IP forwarding service that is accessible over the logical termination of the IP layer at the mobile terminal and one or more gateways (e.g., GGSN, Mobile IP-aware router) at the wireless access network infrastructure. The IP forwarding service is established by employing signaling procedures (e.g., PDP context signaling in the UMTS case [4] [5]) specific to the technical architecture of each wireless access network.

Technical reviews of existing wireless access standards [5] [6] as well as recent research contributions on the similarities of wireless network architectures [7] [8] [9] [10] clearly support these assumptions.

The rest of the present paper is structured as follows; Section II presents the fundamental high-level requirements of 4th generation systems. Section III highlights important value chain impacts in 4th generation mobile communication environments and identifies the pivotal roles engaged in the service provision process along with its critical aspects. Section IV identifies the key enabling technologies to address the aforementioned requirements. Section V concludes the paper and proposes a set of directions for the 4th generation research agenda.

II. HIGH LEVEL REQUIREMENTS

A. User requirements

In the forthcoming 4th generation era, the mobile user will expect to be able to access the same services from a variety of terminals with highly diverse characteristics (e.g., cellular phone, PDA, laptop computer) in terms of processing power, availability of persistent storage and content visualization capabilities. In

addition, when browsing for available applications and value-added services, he/she will expect to be presented with a list that matches not only the current capabilities of the mobile terminal equipment in use, but also his/he personal preferences (e.g., language). These technically demanding expectations raise the need for a flexible service provision process that accommodates these disparate concerns and undertakes all necessary interactions with the underlying network infrastructure and the application-hosting servers [11].

B. Quality of service and billing requirements

The provision of quality of service guarantees for user traffic streams is intrinsically bound to the application of differentiated pricing and billing schemes. The multitude of players in the 4th generation value chain and the plethora of possible pricing and billing combinations suggests that the underlying pricing and billing architecture should adopt a segregated structure where access and transport related charges are computed independently from service and session related ones [12] [13] [14]. The development of innovative applications marketed in the context of multi-party business arrangements is expected to further raise the bar on candidate charging & billing architectures by requiring support for advanced and sophisticated features (e.g., pre-paid, hot-billing, reverse charging, multi-party charging, etc). Therefore, the service provision process must interact dynamically with the charging process in order to provide notification mechanisms that communicate to each user the portion of the current – and overall – charges that attributes to each domain (i.e. transport or application) for each particular session. Furthermore, such pricing information must be provided in a format that is clear, succinct and readily understandable even by non IT-literate users.

C. Service and application requirements

To achieve mass scale deployment over millions of mobile terminals from different manufacturers and with disparate characteristics, application architectures should adopt the “write once, run anywhere” paradigm. Virtual machine approaches and interpreted languages lend themselves nicely to the diversity of mobile devices as well as their restricted capabilities that may not suffice for a full compilation of a downloaded application. In addition, independent service providers will be relieved from the burden of developing, supporting and maintaining multiple versions of their applications for each possible client architecture – along with all the related benefits in terms of cost savings, improved application quality and simplified deployment. Due to volatility and unpredictability of the exact context an application will run within, service adaptability mechanisms are particularly useful, especially in the light of the technological heterogeneity of fourth generation mobile environments. As an additional requirement, services should be able to communicate the quality of service requirements of their traffic flows to the system, either statically (e.g., via a service profile) and/or dynamically (e.g., by means of an appropriate API).

III. VALUE CHAIN DEVELOPMENTS AND SERVICE PROVISION ASPECTS

A. Value chain impacts

With regard to service provision matters and consequent market developments, existing 3rd generation mobile telecommunication systems constitute a paradigm shift from the inflexible subscription-based offerings of their vertically architected predecessors [15]. Supported by an unobtrusive regulatory framework, the emerging era of mobile communications will be characterized by the participation of multiple players in the value chain, thereby reaping the economical and developmental benefits of competition, namely diversified service offerings and sustainable technological evolution. These new players will typically come in the form of value added service providers, application providers, content providers and content aggregators – to name but a few – that will contribute additional value to the overall service provision process and compete alongside the mobile network operator for the lion’s share of user revenue. Figure 2 illustrates the effect of competition levels on the value chain structure in the mobile communications sector.

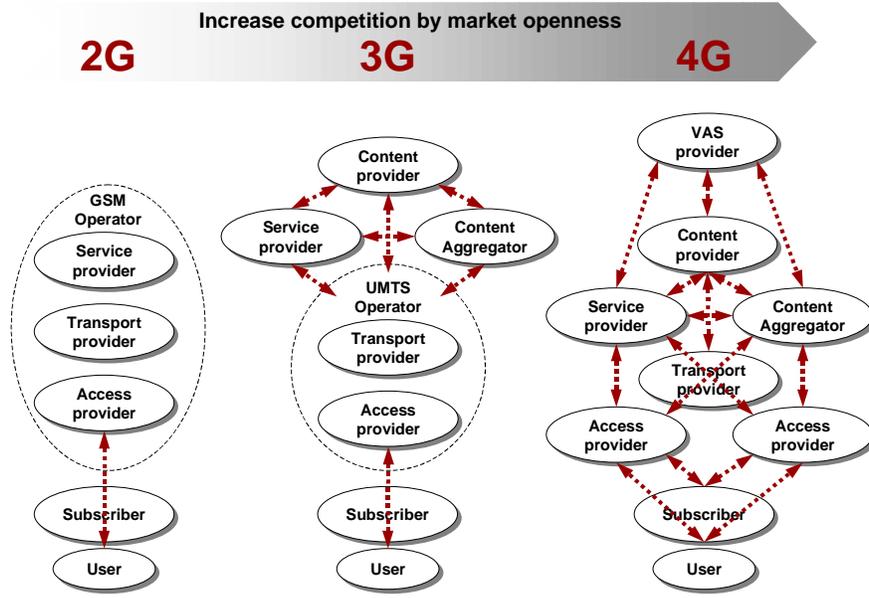


Figure 2. Value chain evolution in the mobile communication sector.

B. Analyzing the vision

It is commonly understood that fourth generation of 4th mobile communication systems will comprise a variety of wireless access networks in a complementary manner. Over this technologically heterogeneous infrastructure, a plethora of disparate services and multimedia applications will have to be deployed in an efficient yet flexible manner, thus raising the bar on service management requirements [16]. On the other hand, mobile users will expect seamless global roaming across these different wireless access systems and ubiquitous access to personalized applications and content via a universal user-friendly interface.

In studying the implications of the heralded “always best connected” vision of 4th generation systems, one can readily identify the notion of utility, implicitly embedded in the “best” adjective. Utility is a cornerstone concept in microeconomic theory that concerns a – typically – continuous function representation for the consumer’s preference relation over a set of commodities [17] [18] [19] [20]. The following section elaborates on user utility issues.

C. User utility issues

Users consume services and applications to realize various benefits, and as long as these benefits overbalance the respective charges, users will continue consumption. Communication-based services and applications depend on the timely and orderly provision of network transport services to realize their functionality. Inasmuch as the network is unable to provide the required levels of service, user-perceived benefits of these applications will remain elusive, thus leading to a degraded user experience.

Communication-based applications make use of transport services to exchange application-specific signaling between remote application entities and to transport various forms of user information (e.g., image, video, corporate data, etc) between communicating endpoints. Overall application performance is dependent on the accommodation of quality of service requirements for their native signaling as well as for the transport of arbitrary user information. From a network viewpoint, these factors translate to traffic flows with different quality of service requirements that will levy different charges – at least in principle – thus decreasing user satisfaction. Consequently, ensuring an adequate performance level for communication-based applications so as to maximize user satisfaction, requires honoring the quality of service requirements of their traffic flows while minimizing the overall charges incurred, i.e., solving the user’s utility maximization problem. Notably, transport service providers face the dual problem, i.e., maximizing

revenue and minimizing network resource usage levels whilst satisfying quality of service requirements for all traffic flows.

Therefore, we claim that the notion of user utility and underlying preferences must necessarily constitute a fundamental building block of 4th generation system architectures, and an issue that should always be accounted for in the respective service provision process.

D. Service provision in fourth generation mobile network environments

Given the multitude and diversity in the product offerings of the potential value chain participants, the technological complexity of an heterogeneous communication environment and the IT illiteracy of a major consumer segment, we understand that most users will be unwilling – or even unable – to engage and coordinate service provision all by themselves. Consequently, in fourth generation systems, some kind of intelligent mediation, as part of the service provision process, will be necessary to efficiently accommodate the utility-related aspects revealed by the “always best connected” vision. Recent research efforts in intelligent mediation issues highlight the huge potential of service provision platforms for the flexible yet efficient service deployment of value-added services and multimedia applications over heterogeneous network environments [21] [22] [23]. The alternative option is to impose several bilateral customer relationships between the user and all kinds of wireless access network operators he/she wishes to use when accessing the universe of services and applications. However, that significantly complicates service provision matters by mandating the resolution of all technical issues (e.g., deployment mechanisms, activation preconditions, pricing structures, etc) on a per service provider-mobile network operator basis for each particular user – an approach that is obviously non-scalable.

E. Intelligent mediation

Intelligent mediation introduces a new role in the value chain, besides the existing roles of network operators and (value added) service providers. That new entrant will maintain the customer relationship with the subscriber and provides him/her with a universal roaming and service access capability whilst accommodating his/her personal preferences, regardless of the access network(s) and terminal equipment in use. Regardless of whether this new role will emerge from existing VHE or MVNO [24] [25] approaches, one of its major tasks will be to provide billing services for its customers by collecting related charging information from other players engaged in the service provision process, correlating it and issuing a single itemized bill to the customer, thus fulfilling user requirements for one-stop billing. In parallel to the billing process, it will also act as a clearinghouse, realizing accounting procedures that apportion overall revenue between the interested players according to bilateral or multilateral accounting agreements. That would relieve the burden of associating multiple bills with one or more access sessions from the user and significantly improve his/her system experience. Such accounting models have known wide acceptance in the credit card business; thus, we feel they could be successfully applied in the mobile telecommunication sector as well.

The described scenario imposes a paradigm change in terms of the network operator role, as well as of the economics of telecommunications. Although it may seem contentious, or even heretic, the authors see no apparent reason why such business combinations should not prosper under mutually satisfactory reciprocity agreements. Notably enough, other authors have embraced similar far-looking visions of market developments in the future mobile communications sector [26].

IV. FOURTH GENERATION ENABLING TECHNOLOGIES

Key constituents of a future-proof architecture for flexible service provision in fourth generation systems are:

A. Adaptable service provision

Knowledge of mobile terminal capabilities will be essential for an efficient service provision process, so that the user is consistently presented with a list of services that can be supported by the mobile device he/she is currently using for service access. Given that wireless access systems differ in their strengths and limitations in terms of coverage area and supported bandwidth, mobile terminal and access network

capabilities (e.g., current traffic load, availability of performance enhancing proxies and content transcoding facilities) should also be considered along with other important flavors of context information (e.g., user location, mobility patterns) for the efficient adaptation of the service provision process to each particular environment and situation.. The implementation of such capability negotiation schemes requires the application of flexible representation formats [27] [28] and announcement procedures [29] like the ones adopted by the 3GPP MExE specification [30] as well as the employment of sophisticated user profiling mechanisms.

Application developers and value-added service providers will benefit from such a capability negotiation mechanism, since they will be relieved from the burden of accommodating the technical details for each possible target system architecture in their application versioning scheme. Mobile network operators will also benefit through the resulting economies in the scarce and expensive spectrum bandwidth, thereby facilitating service for a larger number of mobile terminals per radio coverage area.

B. Transparent mobility and universal roaming capability

The variety of wireless access technologies that will coexist in the 4th generation network environment raises the bar on the technical as well as the regulatory aspects of roaming. Seamless user mobility across various wireless access technologies (e.g., WLAN, UMTS) with minimal or zero user intervention must be supported by efficient inter-system mobility management and handover procedures. To reduce signaling load, micro-mobility should be handled by the specific mobility management mechanisms of each wireless access network, while macro-mobility and roaming should be built on cross-industry standard protocols and architectures, such as hierarchical Mobile IPv6 [31] [32] and AAA [33].

Important research issues that require further investigation are generalized inter-system signaling and handover procedures and incorporation of information from higher layers in mobility management procedures (e.g., user preferences, quality of service requirements of traffic flows, pricing information). These requirements arise from the need to consider pricing information alongside with quality of service levels in the decision stages of the service provision process so as to solve the user's utility maximization problem.

C. Automated system and protocol reconfiguration mechanisms

In a 4th generation environment, the plethora of available – but disparate – applications combined with the existence of multiple wireless access systems, and the need for a user profile-driven decision process, suggests that there may be multiple alternative configurations for the accommodation of the same set of services. For instance, transporting a media stream could be accomplished by means of either a wireless LAN or a UMTS bearer service – provided that the mobile terminal is within the service area of these systems. However, the decision regarding which particular system to use depends on a number of factors, such as the respective cost of service, availability of network resources, radio link quality and user preferences. Continuing our previous example, one could imagine a scenario where the end-to-end signaling between application endpoints is routed via UMTS, because of its predictable performance and quality of service guarantees, while the media stream is routed via a nearby wireless LAN to take advantage of its significantly greater bandwidth capacity. Taking into account that using different systems will result in accruing different charges, user pricing preferences should be allowed to bias the aforementioned decision process in fourth generation mobile communication environments.

Therefore, the respective system and protocol configuration procedures should be dynamic and automated to the highest degree possible so as to allow the application higher-layer control over network transport services. Currently, policy-based management presents the most promising approach to accomplish the aforementioned tasks. Policy-based management [34] [35] demarcates between enforcer entities and decision entities in the infrastructure, thereby allowing the realization of a flexible management architecture that spans across multiple administrative domains [36]. Furthermore, policy protocols support an outsourcing [37] as well as a provisioning [38] model of operation and recent proposals [39] highlight the possibility to further unify these models into a dynamically configurable, highly flexible information exchange pattern based on events. Supported by standard information models that record the features and mechanisms of the infrastructure in a unified manner [40] [41] [42], policy-based management possesses

great potential for the integrated management of the service provision process in heterogeneous network environments.

D. Interoperable QoS management across a range of access systems

Currently, the prevalent QoS models for the IP protocol are Integrated Services (IntServ) [43] and Differentiated Services (DiffServ) [44]. Despite the differences in the scope of their architectural assumptions, control model and tradeoffs between accuracy and scalability, IntServ and DiffServ share a common subset of functionality, e.g., the classification elements in the user traffic forwarding plane. Consequently, it is possible to regard the components of the aforementioned QoS architectures as instances of a generic information model for network elements capable of providing QoS-aware treatment to forwarded IP packets [45]. That, in turn, would constitute part of a generic information model for an entire network infrastructure that provides an aggregate IP forwarding service.

Combined with policy-based management approaches, standardized network information models provide a universal view of network element functionality and facilitate its dynamic configuration regardless of the technologies on which that functionality is built upon. Provided a flexible open API (e.g., IDL) that exposes the quality of service features of the network infrastructure in a technologically opaque fashion and allows a trusted third party to exercise application-level control [46] over the underlying network services is available, the realization of distributed quality of service management schemes across multiple administrative domains becomes greatly simplified.

E. Configurable security

Due to the inherent vulnerability of the air interface, most wireless access technologies (e.g., HIPERLAN, GPRS, UMTS) come equipped with security features of their own [48] [49] (e.g., subscriber authentication, payload encryption, link ciphering etc). From an OSI point of view, these features are realized in link layer protocols, thus leading to unnecessary duplication of security functionality when network [50] [51] or application layer security features (e.g., HTTPS) are employed as well. To economize the scarce wireless interface, the efficient and coordinated configuration of security features at the link, network and application layer is required. The availability of multiple wireless access systems suggests that to be efficient, the configuration process should operate on a per wireless interface basis.

Furthermore, the constrained capabilities of mobile devices in terms of finite energy supply and processing power may raise the need to negotiate a less resource-intensive security scheme that achieves prolonged communication sessions at the expense of a somewhat weaker security. Evidently, user preferences should always be accounted for when such trade-off decisions arise during security configuration procedures. Last but not least, quality of service and pricing considerations impose the need to include such information in the security configuration process in order to fulfill the “best connected” part of the vision where “best” is subject to interpretation under each user’s preferences.

For example, consider the case of a wireless access network capable of providing network-based VPN services to its roaming users. Business users wishing to access corporate databases using their laptop may be willing to pay a premium price for the greater assurance levels the VPN service offers, while typical users browsing for content may be comfortable with a lower security level – and cost.

F. Flexible pricing and billing mechanisms

The clear demarcation between the network and the service/application domains that has been architected in existing 3rd generation systems suggests that any future-proof charging and billing architecture should portrait similar – if not greater – flexibility in its design. As a minimum requirement, network-related pricing models and policies should be completely independent from service-related ones, with regard to both formulation and application matters. Once again, information model concepts and policy-based management approaches can contribute greatly to the interoperable specification of pricing models for specific domains (e.g., volume-based or QoS-based charging for the network domain) [52] and to the configuration of appropriate components in the network infrastructure, respectively. Figure 3 provides an illustration.

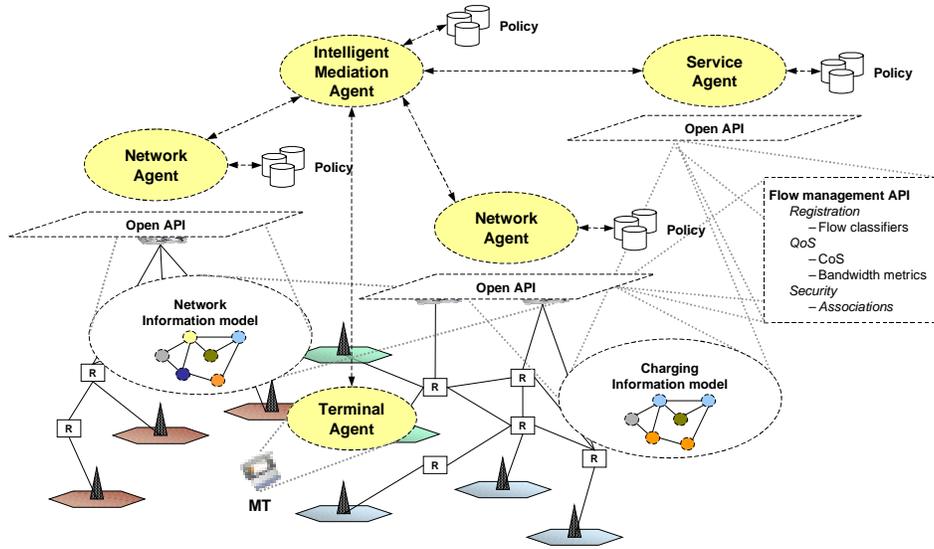


Figure 3. Architectural abstractions of the heterogeneous network infrastructure via open API approaches combined with network and charging information models.

In addition, the configuration and dynamic adaptation of the charging process to the business model and specific user-service combination demands requires a flexible configurable charging infrastructure. The utilization of standardized policies for the expression of conditions and related configuration actions is a critical issue, since it allows the configuration of heterogeneous infrastructures in a universally applicable manner. Recent contributions [53] describe an architecture and the respective mechanisms for the provision of configurable accounting services and demonstrate how different charging services can be provided in intra-domain as well as inter-domain scenarios. Furthermore, it elaborates on how charging components can be seamlessly integrated into the authorization framework proposed in [33].

G. Application and mobile execution environment architectures

The execution environment at the mobile terminal should shield applications from mobility-induced events (e.g., change of IP address) in the underlying protocol stacks while enabling a rich interaction between applications and the network infrastructure to take place. Therefore, any API that exports the transport services of the execution environment to the applications should avoid using network or link related information (e.g., IP address, port numbers) in its class and method definitions. Such information should be handled internally by the execution environment via other libraries that in a sense are wrapped by the aforementioned transport services API. Ideally, applications would use the transport services API to instantiate “flow” objects over which information maybe exchanged with their counterparts. These “flow” objects will be opaque with regard to the protocol details of the underlying connectivity service, thus shielding applications from undesirable network events (e.g., loss of transport socket connection). These events should be handled by the execution environment that will undertake to send the appropriate notification to the application, allowing for the graceful termination of its active communication processes, if necessary.

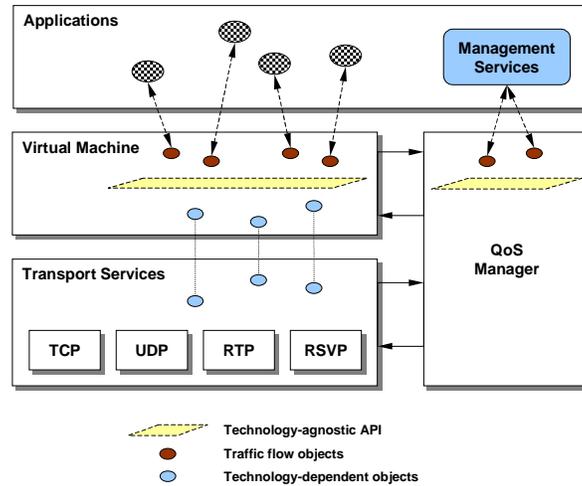


Figure 4. Architectural components of fourth generation mobile execution environments.

The proposed approach absorbs mobility-related events and prevents the abrupt disruption of active application sessions at the mobile terminal, even in cases of complete connectivity loss. It does not really impose any specific application architecture on the independent service providers, since they will be developing their applications with a suitable API anyway. It does set some technical requirements on the mobile terminal manufacturer in terms of event management features in the execution environment – but similar requirements have already been drafted for 3rd generation mobile terminals [30]. Therefore, we feel that any additional complexity will be more than compensated for by the significant improvement in application resilience and manageability.

In addition, the mobile terminal must provide a local QoS Manager [30] that interacts with the active applications, accepting requests for the allocation of resources for their traffic flows and forwarding them to the intelligent mediation agent if the available resources at the mobile terminal suffice. Thus, the QoS signaling procedure should proceed in a two-stage admission control – one at the mobile terminal (since it is a restricted device in terms of processing capabilities and power resources), and one at the intelligent mediation agent that will aggregate the admission control decisions from the wireless access networks employed for that particular communication. Undoubtedly, there will be cases where the mobile terminal rather than the wireless interface is in scarcity of resources (e.g., drained power supply), so this approach can potentially minimize unnecessary signaling over the radio interface and preserve valuable bandwidth.

V. CONCLUSIONS

Advances in mobile communication technologies have been rapid and their effects have frequently manifested themselves in ways and places far beyond the ones imagined by their inventors. With regard to 4th generation mobile communication systems, it is paramount to identify important market developments as well as critical enabling technologies before proceeding to the architecture specification phase. Hierarchical Mobile IPv6 and AAA, capability negotiation frameworks, information model concepts, policy-based management, flexible pricing and billing approaches and last but – certainly – not least, open, technology-independent API frameworks are all important building blocks of 4th generation mobile communication systems architectures.

VI. REFERENCES

- [1]. J. Pereira, “Beyond third generation”, Wireless Personal Mobile Communications (WPMC) 1999, September 22, 1999, Amsterdam, The Netherlands.
- [2]. J. Pereira, “Fourth generation – Now it is personal”, 11th IEEE International Symposium on Personal, Indoor and Mobile Radio Communications, 18 – 21 September 2000, London, United Kingdom.

- [3]. J. Pereira, "Fourth generation – Beyond the hype, a new paradigm", IEE 3G Mobile Communication Technologies, March 28, 2001, London, United Kingdom.
- [4]. 3G TS 22.060 V5.0.0 (2001-10), "3GPP; Technical Specification Group Services and System Aspects; General Packet Radio Service (GPRS); Service Description, Stage 1", December 2001, available from <http://www.3gpp.org/>.
- [5]. 3G TS 23.060 V5.0.0 (2001-10), "3GPP; Technical Specification Group Services and System Aspects; General Packet Radio Service (GPRS); Service Description, Stage 2", December 2001, available from <http://www.3gpp.org/>.
- [6]. ETSI TR 101 683 V1.1.1 (2000-02), "Broadband Radio Access Networks (BRAN); HIPERLAN Type 2; System Overview", available from <http://www.etsi.org/>.
- [7]. R. Hancock, H. Aghvami, M. Kojo, M. Liljeberg, "The architecture of the BRAIN network layer", IST Mobile Communications Summit 2000, 1 – 4 October 2000, Galway, Ireland.
- [8]. T. Paila, S. Alladin, M. Frank, T. Goransson, W. Hansmann, T. Lohmar, R. Toenjes, L. Xu, "Flexible network architecture for future hybrid wireless systems", IST Mobile Communications Summit 2001, 10 – 12 September 2001, Barcelona, Spain.
- [9]. C. Janneteau et al., "IPv6-based mobility support in a beyond 3G system encompassing WLAN and 3G accesses without the 3G core network", IST Mobile Communications Summit 2001, 10 – 12 September 2001, Barcelona, Spain.
- [10]. M. Annoni, R. Hancock, T. Paila, E. Scarrone, R. Toenjes, L. Dell'Uomo, D. Wisely, "Radio access networks beyond 3rd generation: A first comparison of architectures of 4 IST projects", Mobile Communications Summit 2001, 10 – 12 September 2001, Barcelona, Spain.
- [11]. N. Alonistioti, V. Gazis, N. Houssos, S. Panagiotakis, "An Application platform for downloadable VASs provision to mobile users", IST Mobile Communication Summit 2000, 1 – 4 October 2000, Galway, Ireland.
- [12]. V. Gazis, M. Koutsopoulou, C. Farmakis, A. Kaloxylos., "A flexible charging and billing approach for the emerging UMTS network operator role", Applied Telecommunication Symposium, 22 – 26 April 2001, Seattle, Washington, United States.
- [13]. M. Koutsopoulou, C. Farmakis, V. Gazis, "Subscription management and charging for value added services in UMTS networks", IEEE Semiannual Vehicular Technology Conference VTC 2001, Rhodes, Greece, May 2001.
- [14]. M. Koutsopoulou, V. Gazis, A. Kaloxylos, "A novel billing scheme for UMTS networks", International Symposium on 3G Infrastructure and Services (3GIS), 2 – 3 July 2001, Athens, Greece.
- [15]. 3G TS 22.105 V5.0.0 (2001-10), "3GPP; Technical Specification Group Services and System Aspects; Service Aspects; Services and Service Capabilities", December 2001.
- [16]. N. Houssos, V. Gazis, S. Panagiotakis, S. Gessler, A. Schuelke, S. Quesnel, "Value added service management in 3G networks", Network Operations and Management Symposium (NOMS) 2001, 15 – 19 April 2002, Florence, Italy.
- [17]. A. Mas-Collel, M. D. Whinston and J. R. Green, "Microeconomic Theory", Oxford University Press, ISBN 0-19-510268-1.
- [18]. C. Courcoubetis G. Stamoulis, C. Manolakis, F. Kelly, "An intelligent agent for optimizing QoS-for-money in priced ABR connections", available from <http://www.statslab.cam.ac.uk/~frank/PAPERS/>.
- [19]. S. Khan et al., "The utility model for adaptive multimedia systems", International conference on Multimedia Modeling, Singapore, November 1997, available from http://www.lapis.ece.univ.ca/WWW_LAPIS/LapisPublications.html.
- [20]. S. Khan, "Quality adaptation in a multisession multimedia system: Model, algorithms and architecture", Ph. D. Dissertation, May 1998, available from http://www.lapis.ece.univ.ca/WWW_LAPIS/LapisPublications.html.
- [21]. A. Alonistioti, N. Houssos, S. Panagiotakis, "A framework for reconfigurable provisioning of services in mobile networks", ISCTA 2001, Ambleside, United Kingdom, 15 – 20 July 2001.
- [22]. M. Grech, R. McKinney, S. Sharma, J. Stanaway, D. Varney, K. Vemuri "Developing seamless services in open networks using intelligent service mediation", Bell Labs Technical Journal, July – September 2000.
- [23]. J. Oliveira, R. Roque, S. Sedillot, E. Carrapatoso, "Creation of 3rd generation services in the context of Virtual Home Environment", ICN 2001, March 2001.
- [24]. "Virtual Mobile Services: Strategies for Fixed and Mobile Operators", April 2000, by OVUM.

- [25]. D.Varoutas et al, "Economic viability of 3G Mobile Virtual Network Operators", 3G Wireless 2002, 28 – 31 May 2002, San Francisco, USA.
- [26]. H. Luediger, S. Zeisberg, "User and business perspectives on an open mobile access standard", IEEE Communications Magazine, September 2000, pp. 160 – 163.
- [27]. W3C XML Technical Specification, available from <http://www.w3c.org/>.
- [28]. W3C RDF Technical Specification, available from <http://www.w3c.org/>.
- [29]. W3C CC/PP Technical Specification, available from <http://www.w3c.org/>.
- [30]. 3G TS 23.057 V4.4.0, "3GPP; Technical Specification Group Terminals; Mobile Station Application Execution Environment (MExE); Functional description, Stage 2", December 2001, available from <http://www.3gpp.org/>.
- [31]. RFC 2460, "Internet Protocol, Version 6 (IPv6) Specification", available from <http://www.ietf.org/>.
- [32]. INRIA Hierarchical Mobile IPv6 Technical Report, available from <http://www.inrialpes.fr/planete/people/bellier/hmip.pdf>.
- [33]. RFC 2904, "AAA Authorization Framework", available from <http://www.ietf.org/>.
- [34]. RFC 3198, "Terminology for Policy-Based Management", available from <http://www.ietf.org/>.
- [35]. "A primer on policy-based network management", available from <http://www.hp.com/>.
- [36]. M. L. Stevens et al., "Policy-based management for IP networks", Bell Labs Technical Journal, October – December 1999, pp. 75 – 94.
- [37]. RFC 2748, "The Common Open Policy Service (COPS) protocol", available from <http://www.ietf.org/>.
- [38]. RFC 3084, "COPS usage for policy provisioning", available from <http://www.ietf.org/>.
- [39]. Internet Draft, "COPS-PR for outsourcing in UMTS: UMTS Go PIB", available as draft-hamer-rap-cops-umts-go-00 from <http://www.ietf.org/>.
- [40]. V. Tomic, S. Djordjevic-Kajan, "The Common Information Model (CIM) Standard - An Analysis of Features and Open Issues", 4th International Conference on Telecommunications in Modern Satellite, Cable, and Broadcasting Services, Nis, Yugoslavia, October 1999, available from <http://www.sce.carleton.ca/~vladimir/>.
- [41]. RFC 3060, "Policy Core Information Model – Version 1 Specification", available from <http://www.ietf.org/>.
- [42]. Internet Draft, "Policy Core Information Model Extensions", available as draft-ietf-policy-pcim-ext-06 from <http://www.ietf.org/>.
- [43]. RFC 1633, "Integrated Services in the Internet Architecture: an Overview", available from <http://www.ietf.org/>.
- [44]. RFC 2475, "An Architecture for Differentiated Services", available from <http://www.ietf.org/>.
- [45]. Internet Draft, "Policy Framework QoS Information Model", available as draft-ietf-policy-qos-info-model-04 from <http://www.ietf.org/>.
- [46]. P. Sijben, M. Buckley, J. Segers, L. Spergel, "Application-level control of IP networks: IP beyond the Internet", Bell Labs Technical Journal, January-June 2001, pp. 98 – 116.
- [47]. Internet Draft, "Information Model for Describing Network Device QoS Mechanisms", available as draft-ietf-policy-qos-device-info-model-06 from <http://www.ietf.org/>.
- [48]. 3G TS 33.102 V4.3.0 (2001-12), "3GPP; Technical Specification Group Services and System Aspects; 3G Security; Security Architecture", December 2001.
- [49]. ETSI TR 101 054 V1.1.1 (1997-06), "Security Algorithms Group of Experts (SAGE); Rules for the management of the HIPERLAN Standard Encryption Algorithm (HSEA)", available from <http://www.etsi.org/>.
- [50]. Internet Draft, "Security Properties of the IPsec Protocol Suite", available as draft-ietf-ipsec-properties-01 from <http://www.ietf.org/>.
- [51]. Internet Draft, "IP Encapsulating Security Payload (ESP)", available as draft-ietf-ipsec-esp-v3-01 from <http://www.ietf.org/>.
- [52]. F. Hartanto, G. Carle, "Policy-based billing architecture for Internet Differentiated Services", IFIP Fifth International Conference on Broadband Communications, Hong-Kong, 10 – 12 November 1999.
- [53]. Internet Draft, "Policy-based Accounting", available as draft-irtf-aaaarch-pol-acct-04 from <http://www.ietf.org/>.